


2/22

FIG. 2

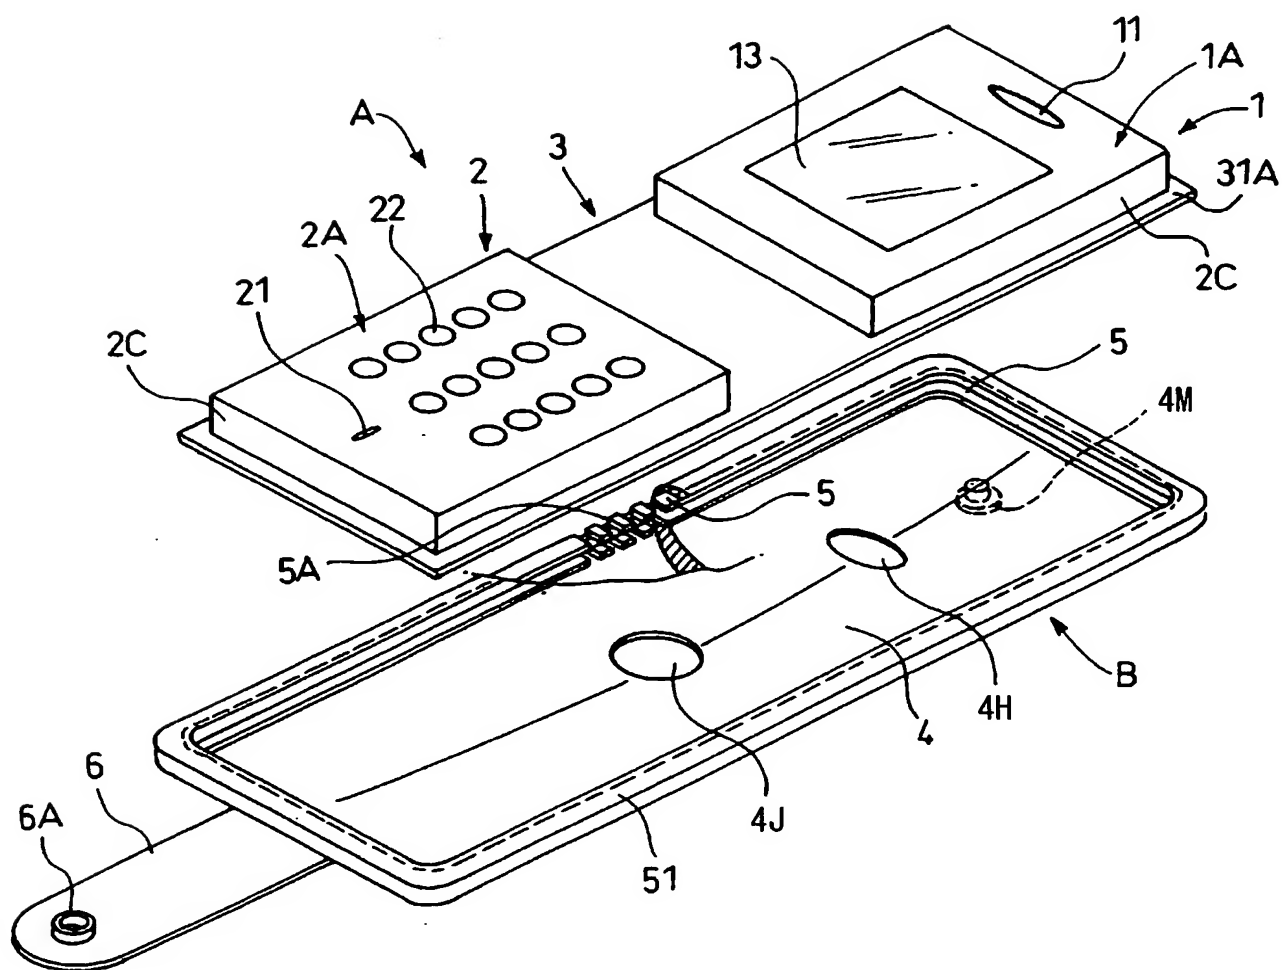

3/22

FIG. 3 (A)


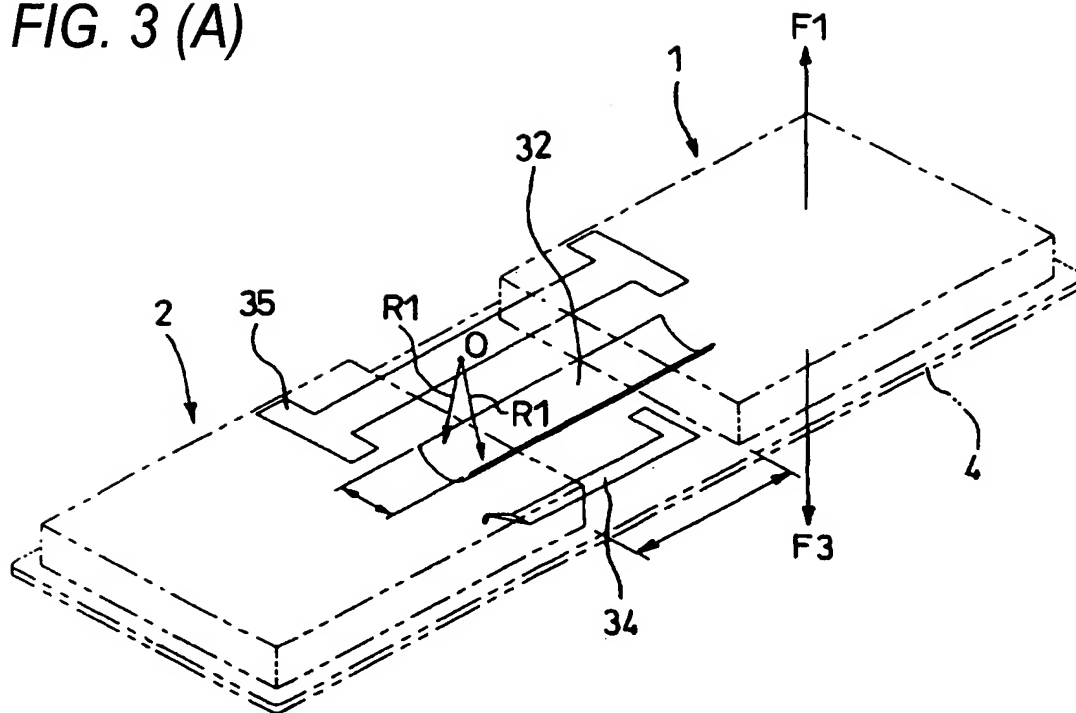


FIG. 3 (B)

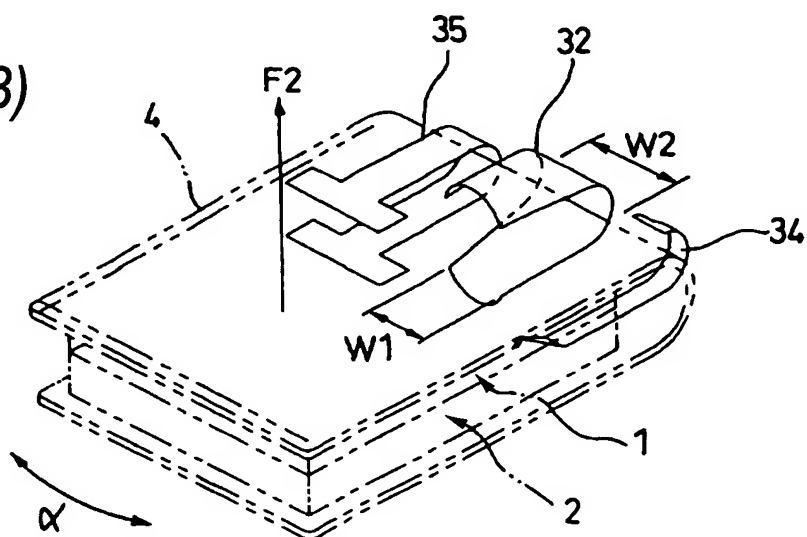

4/22

FIG. 4



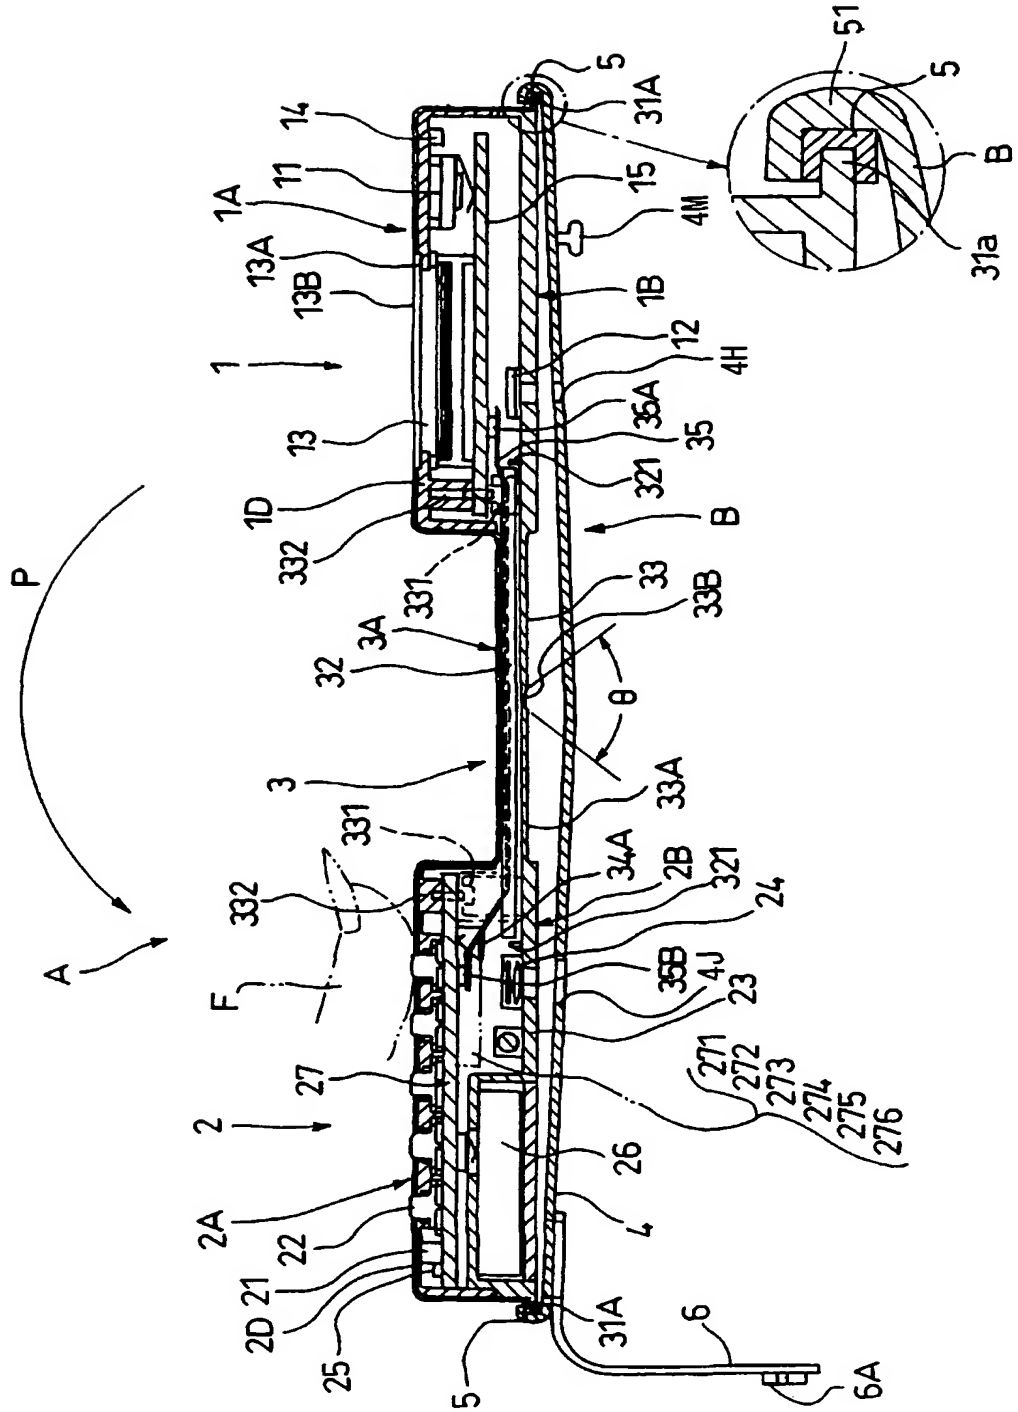


FIG. 5

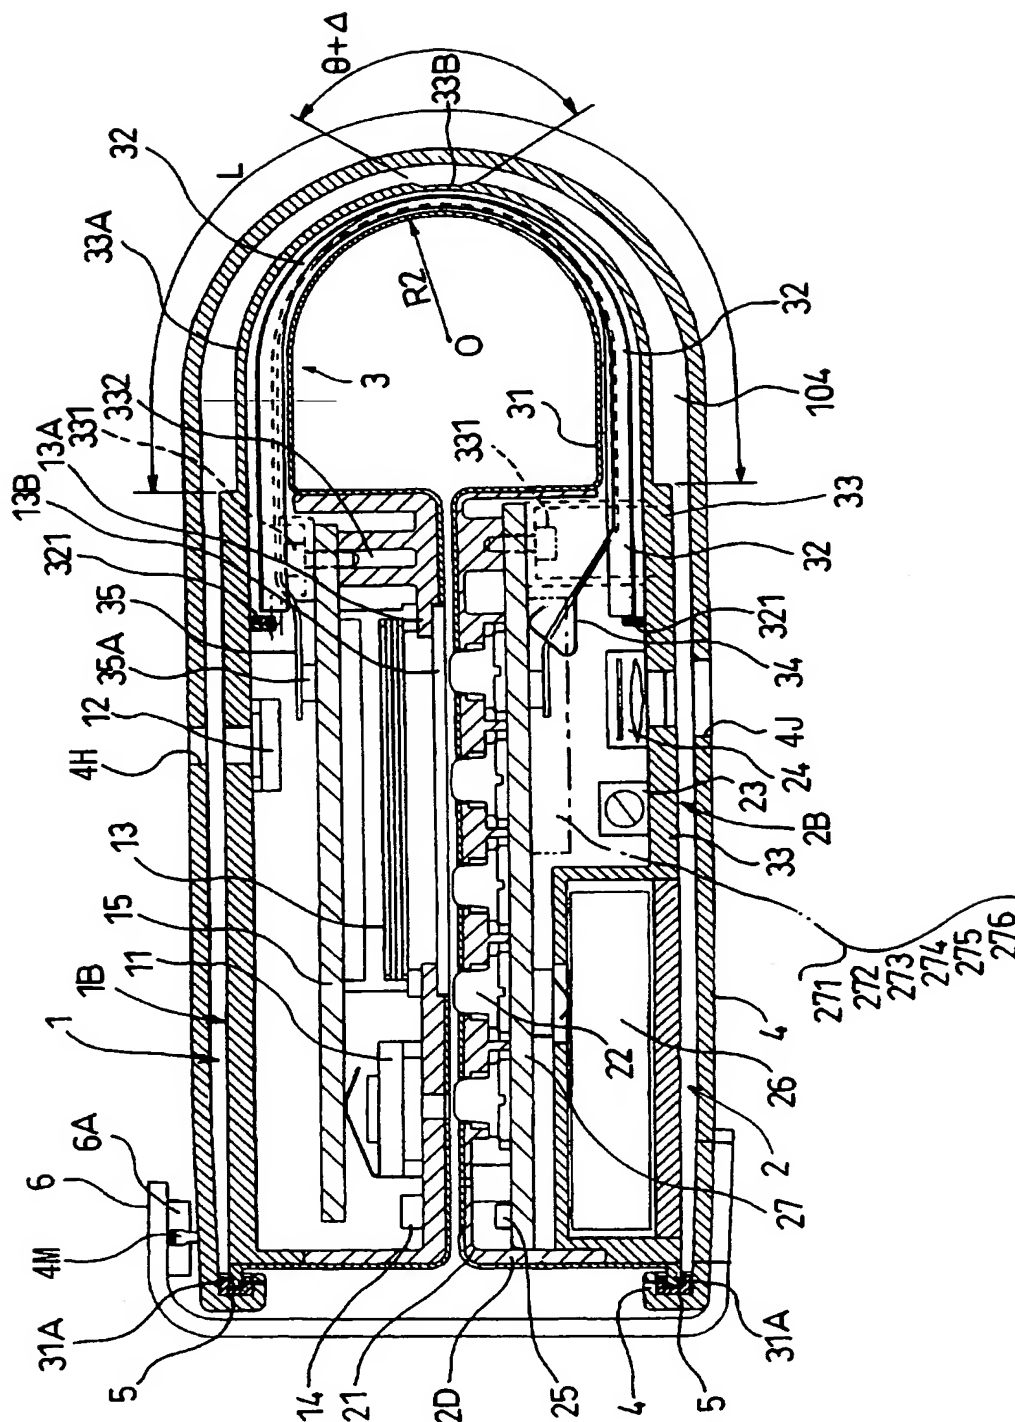


6/22

FIG. 6

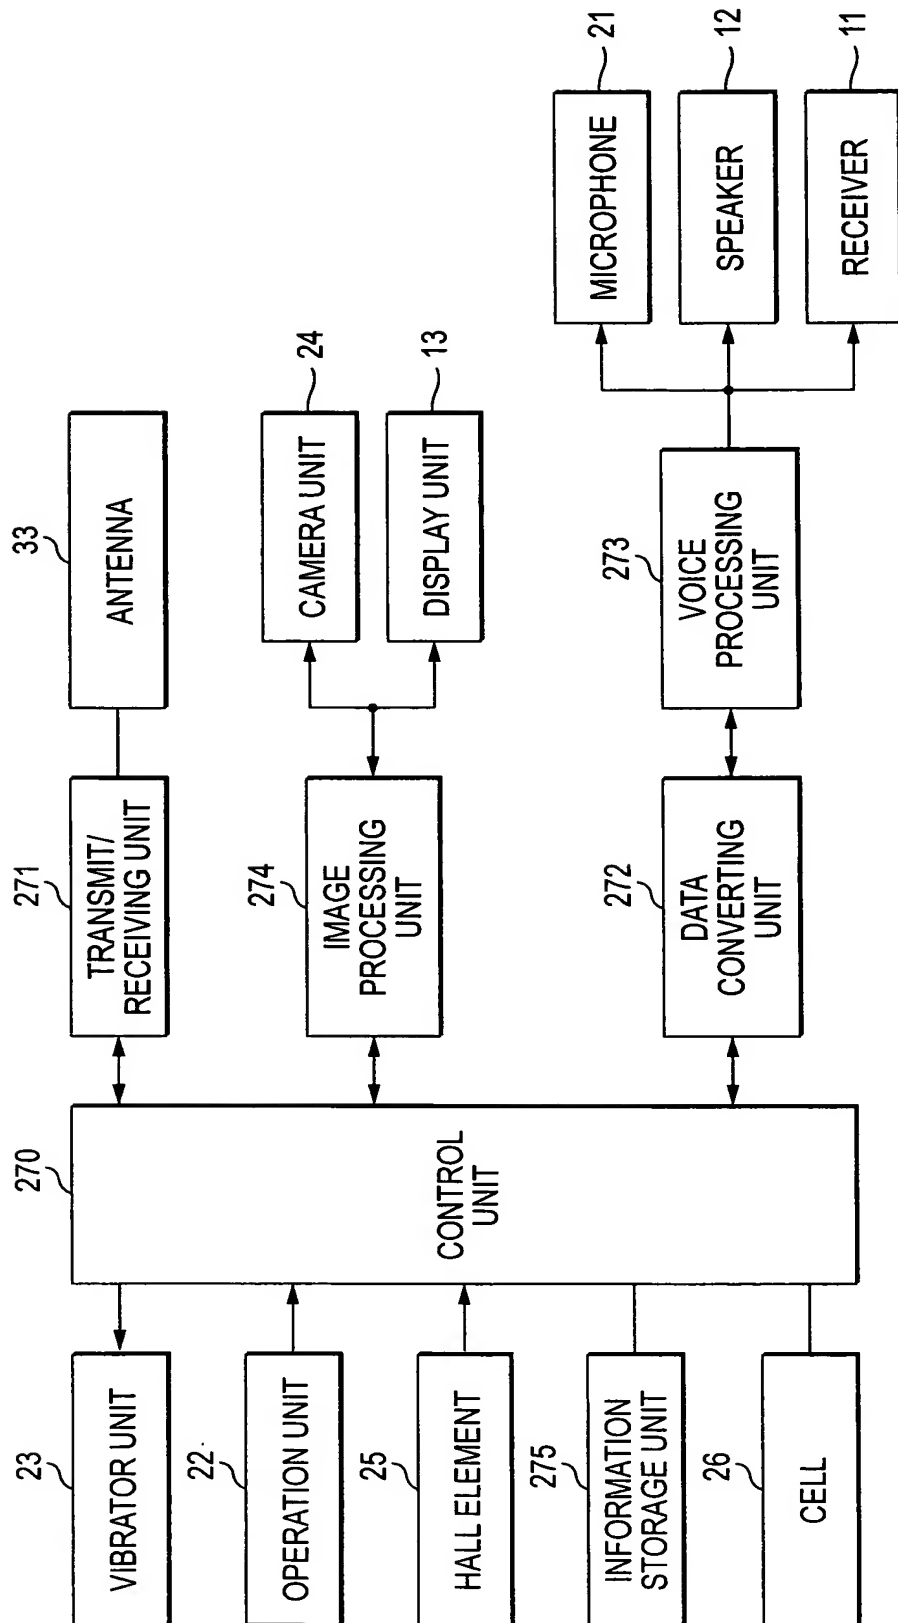


8/22

FIG. 8

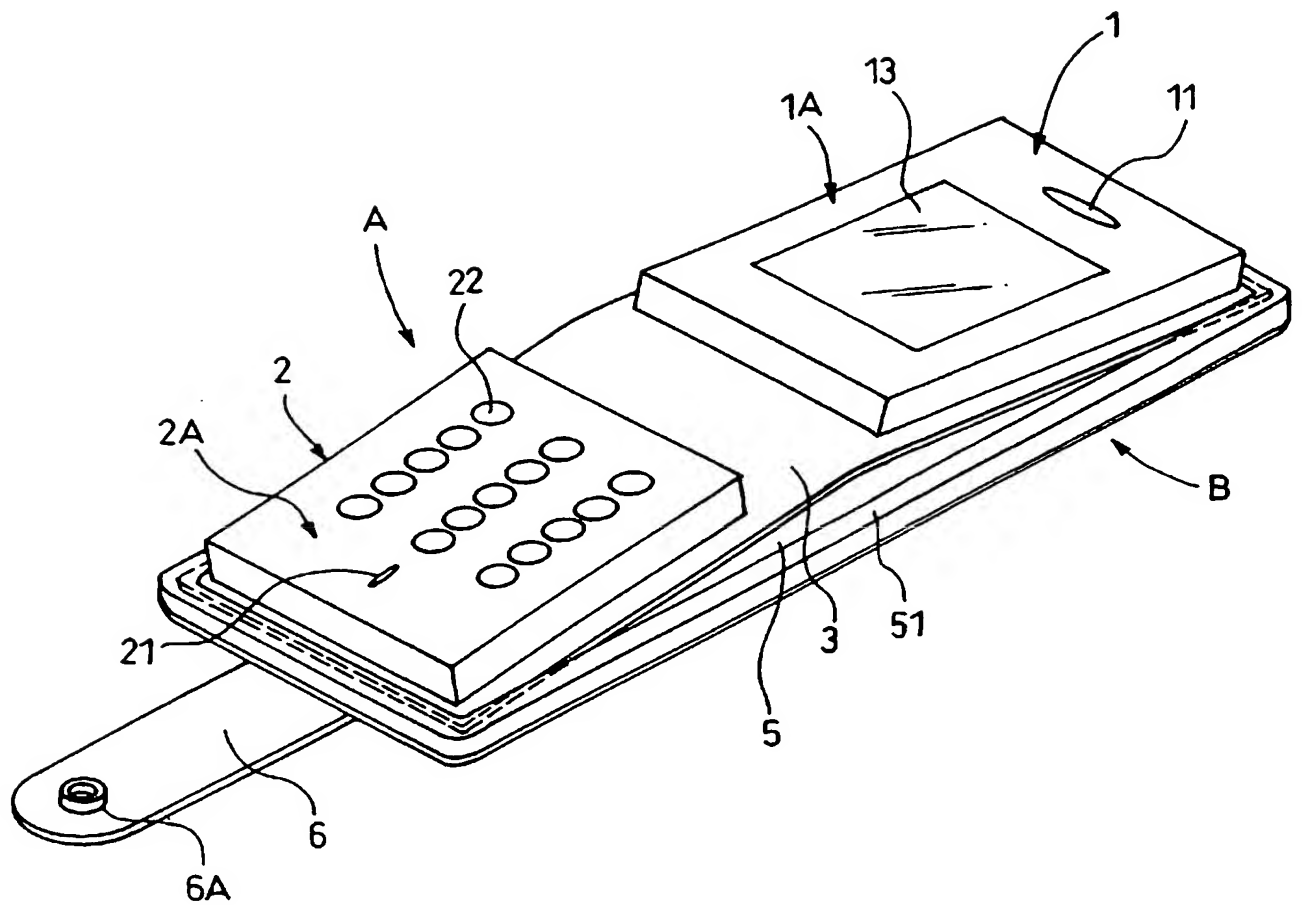


9/22

FIG. 9

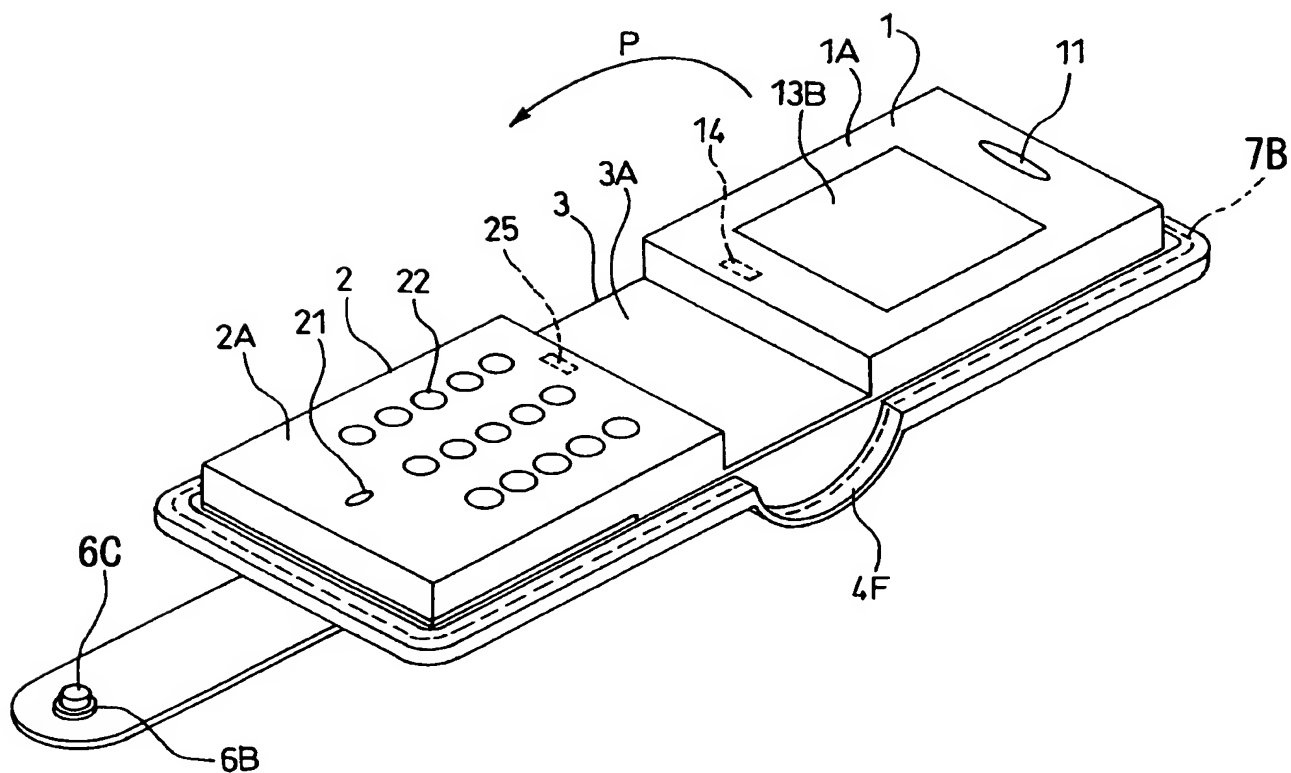

10/22

FIG. 10

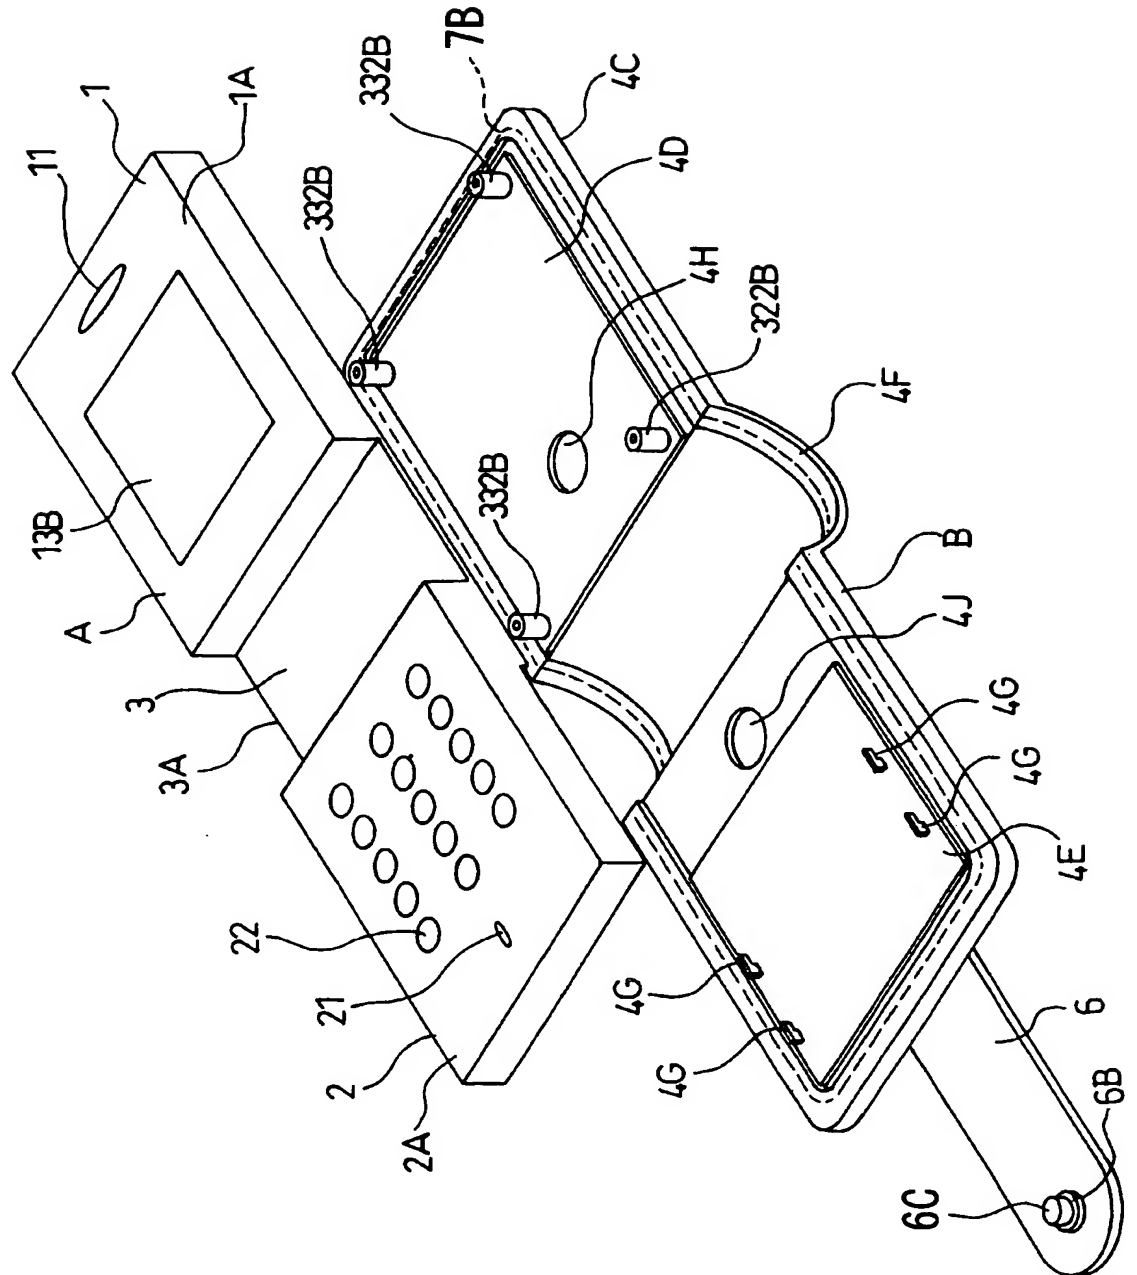

11/22

FIG. 11


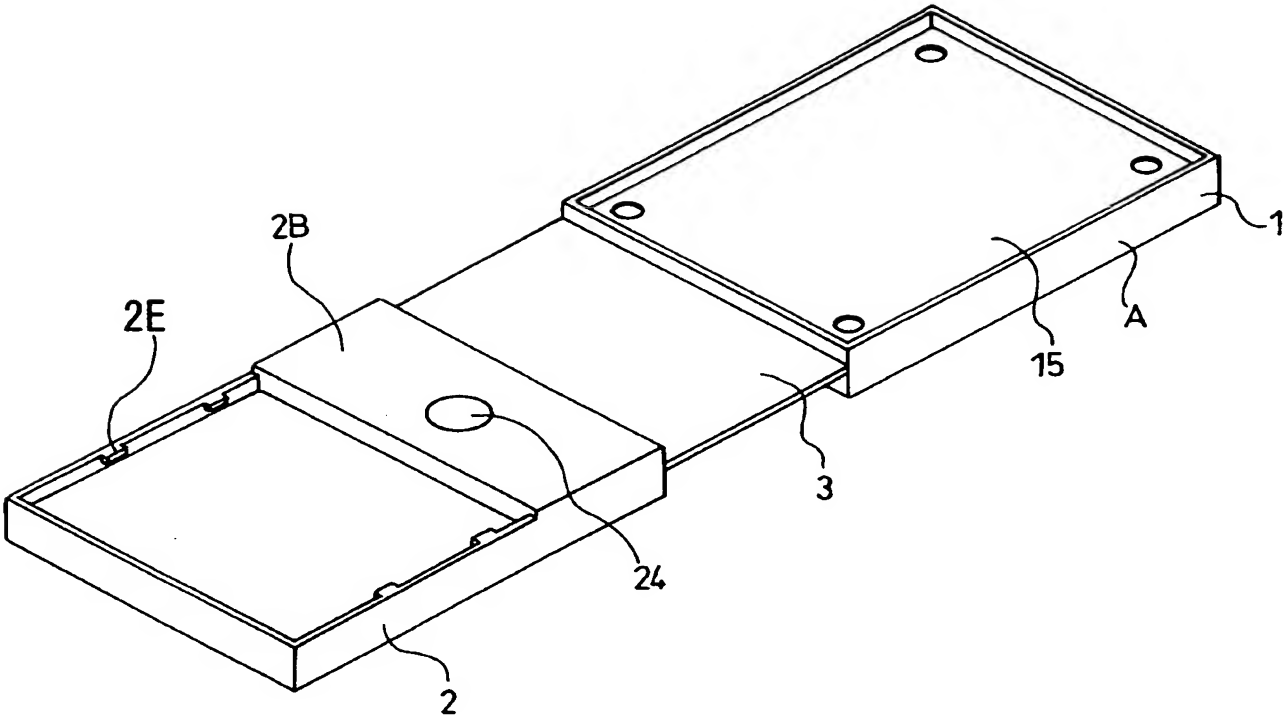


FIG. 12 (A)

FIG. 12 (A) is a perspective view of a device 100. It shows a base 1 with a raised portion 323. A component 3 is positioned on the base, with a width W1 indicated. A force F1 is applied upwards at one end, and a force F3 is applied downwards at the other end. A distance A is marked between the points of application of F1 and F3. A component 34 is shown with a curved shape, and a component 35 is shown with a straight shape. A point O is marked on the base, and a radius R2 is indicated from O to the center of the curved shape 34.


13/22

FIG. 13

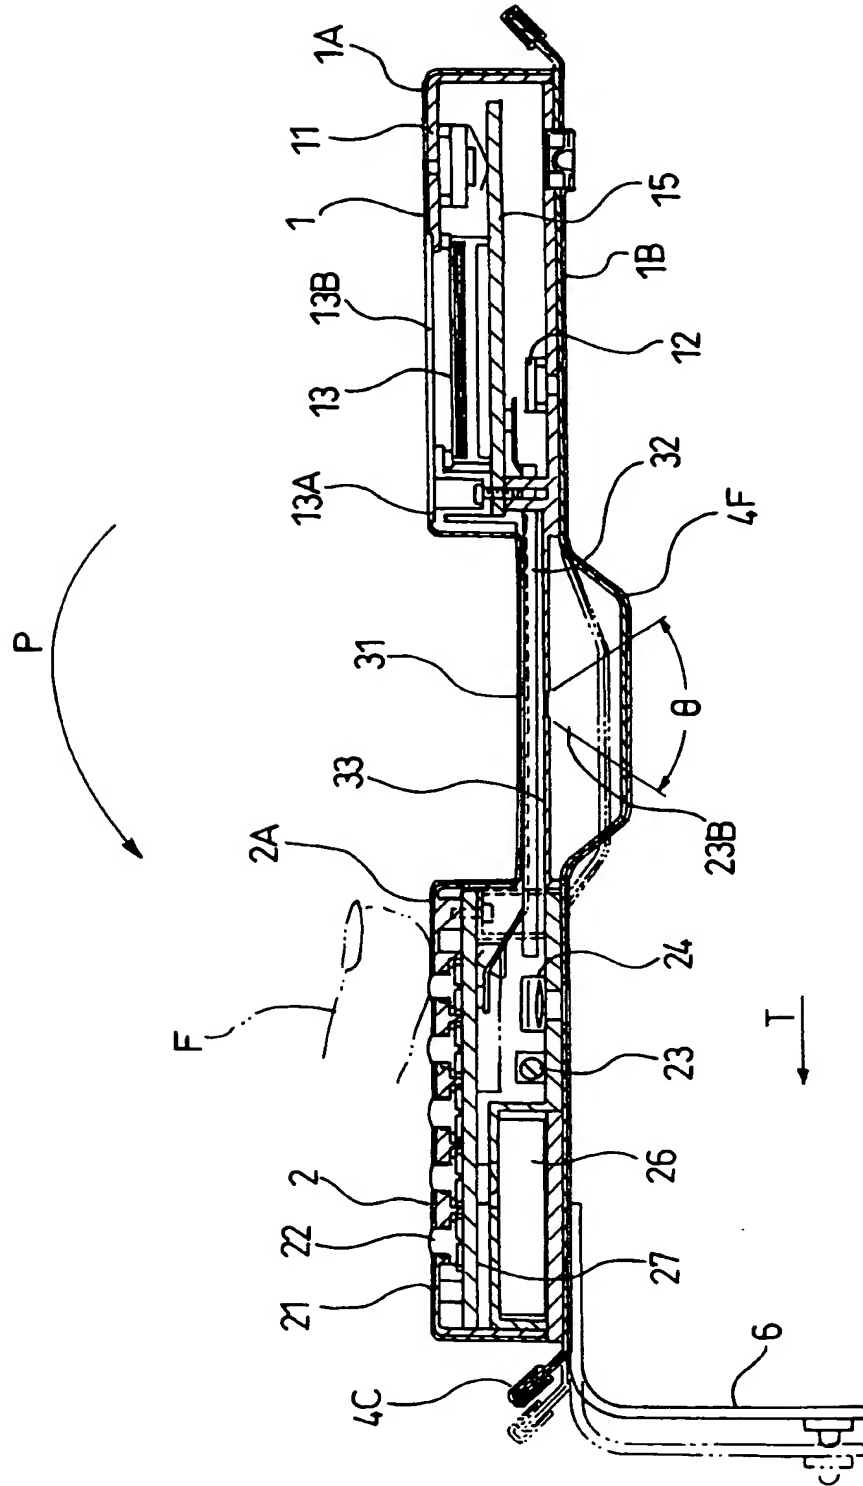


14/22

FIG. 14

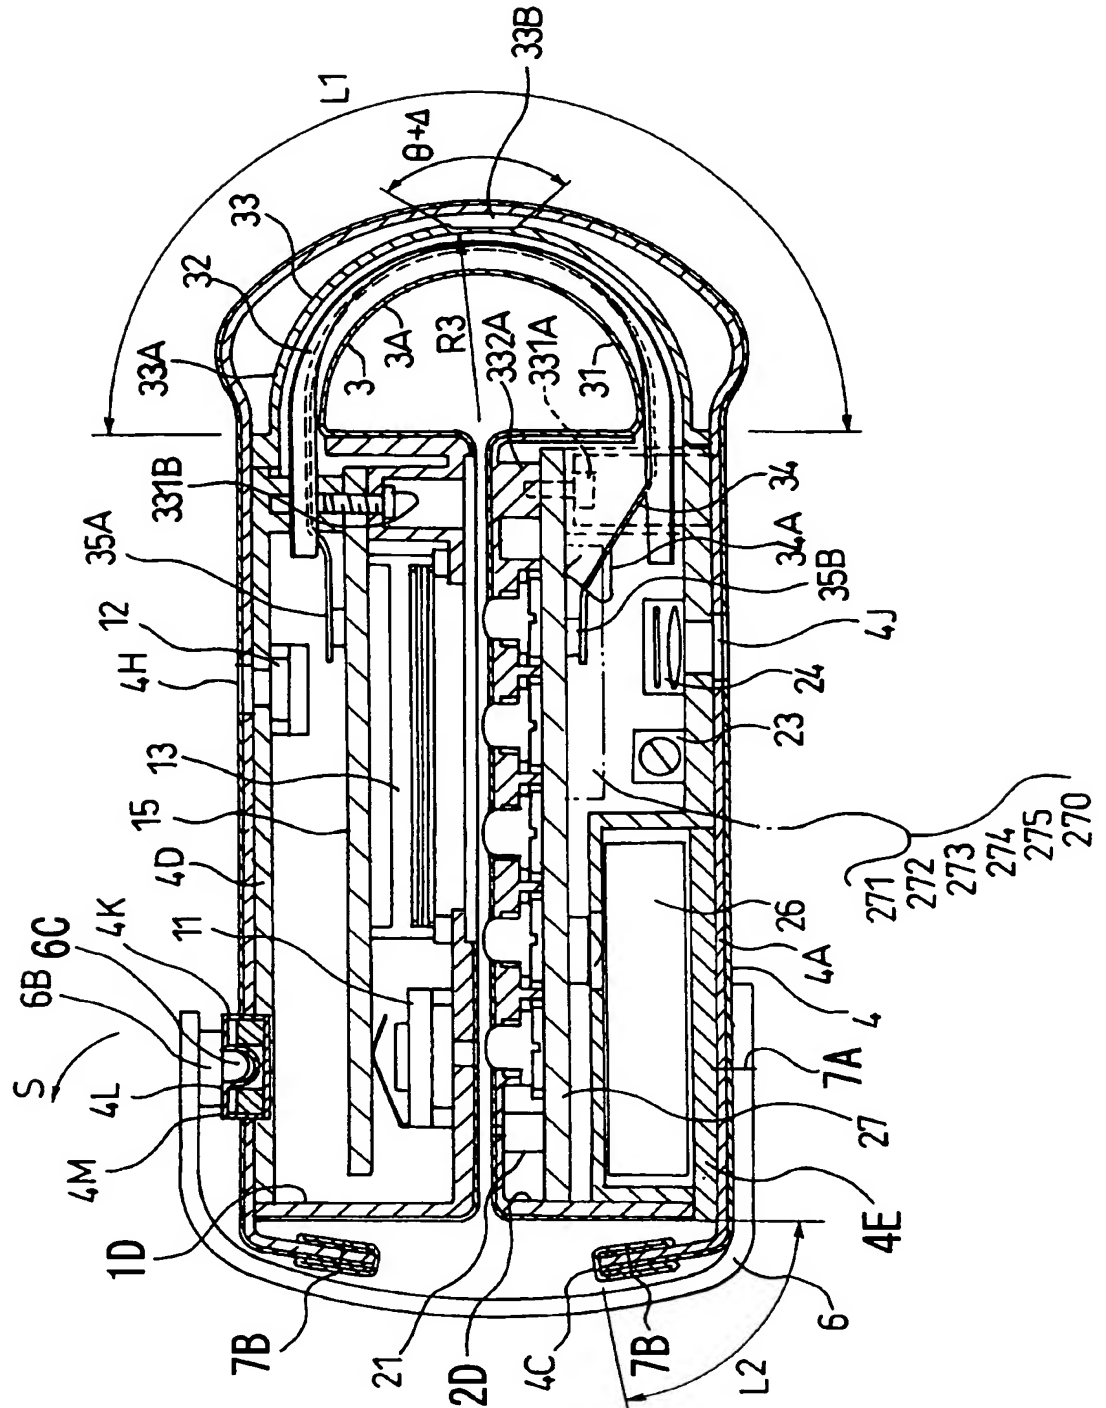


15/22

FIG. 15

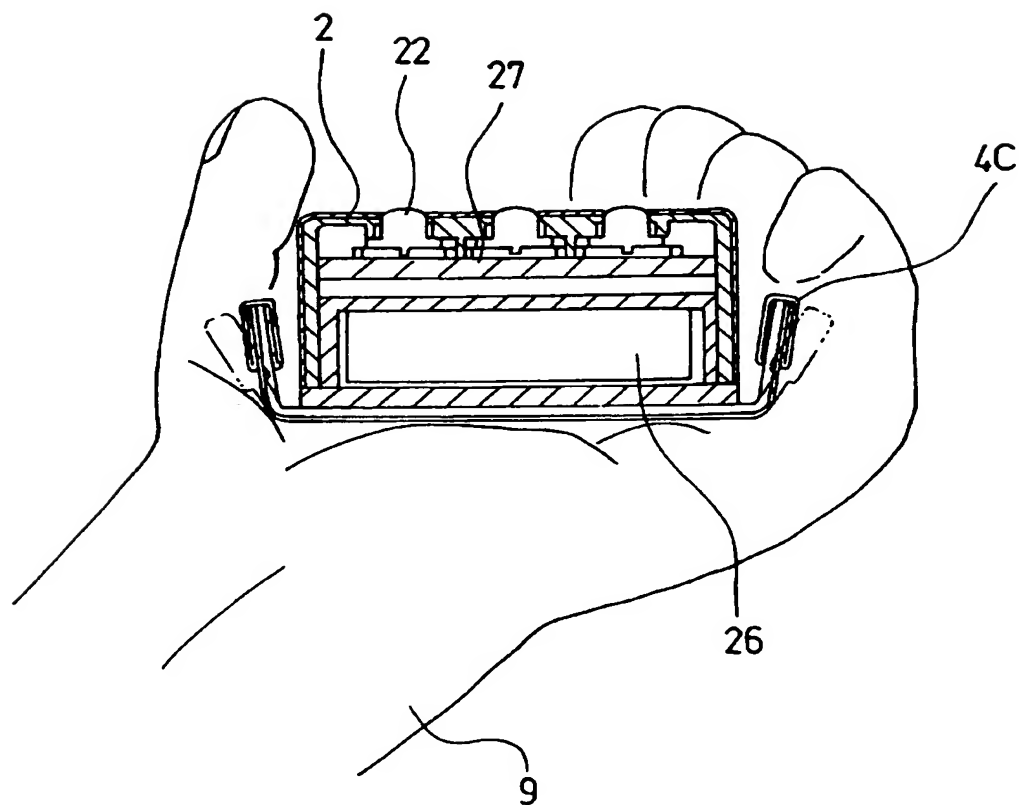

16/22

FIG. 16

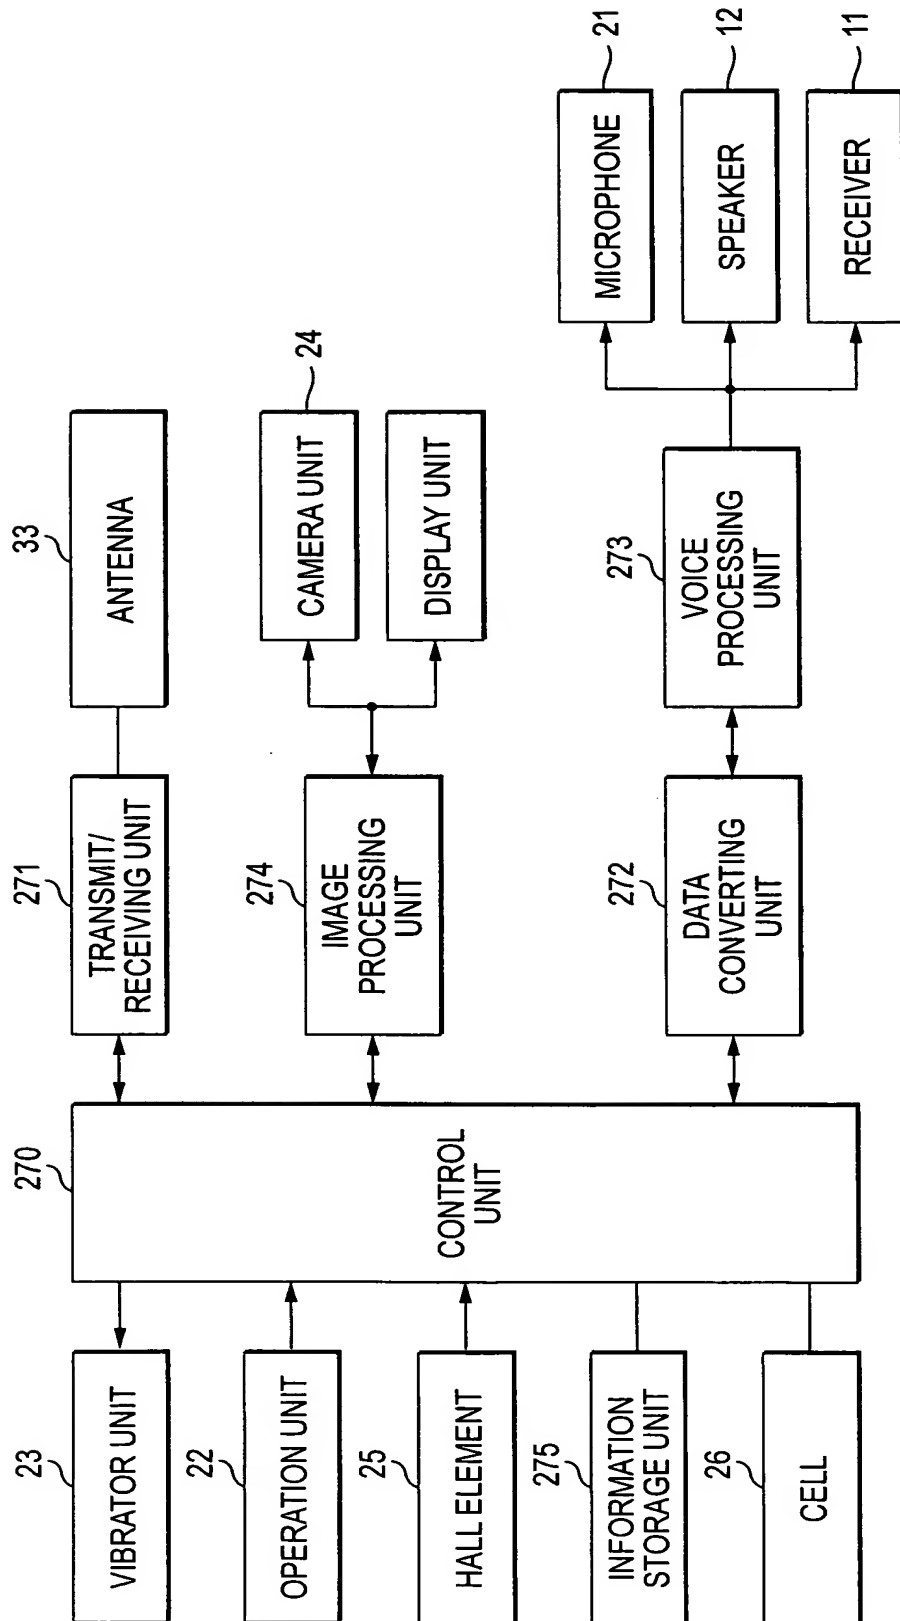

17/22

FIG. 17 (a)

FIG. 17 (b)


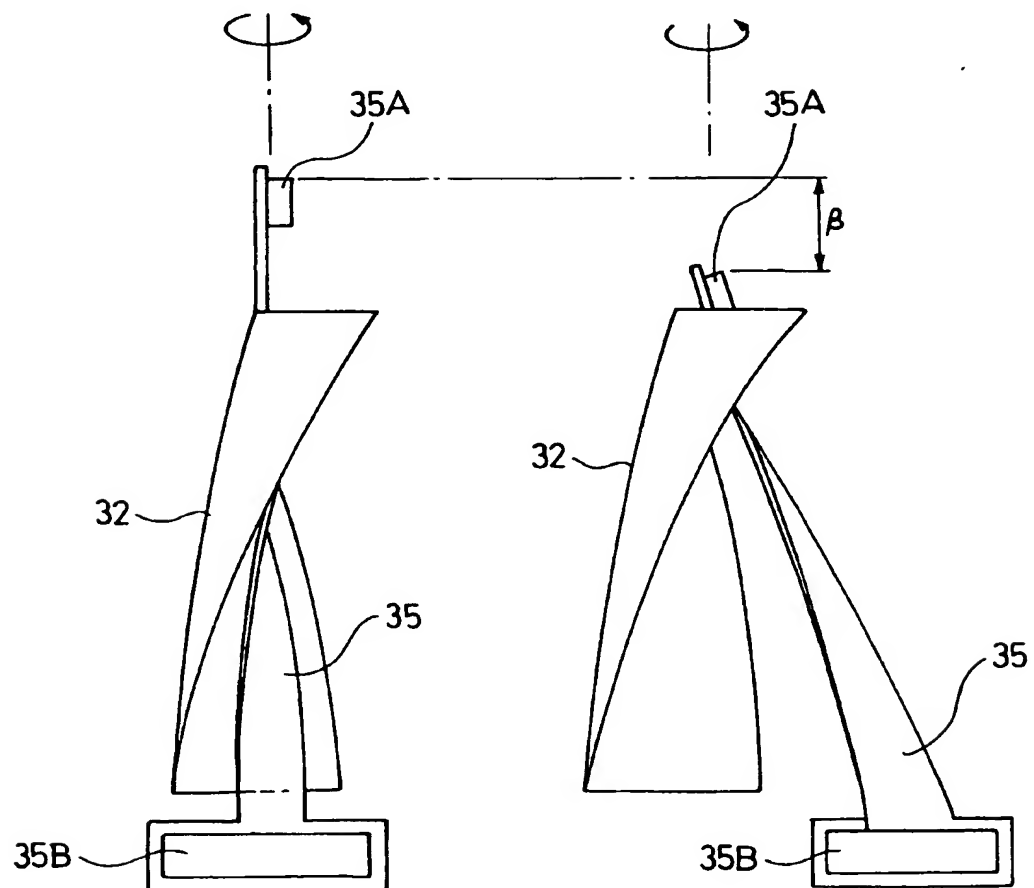


FIG. 18 (a)

FIG. 18 (b)

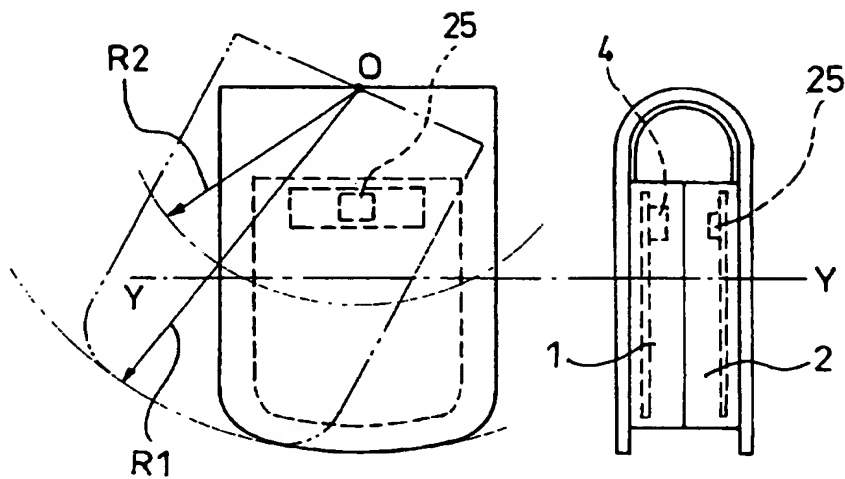

19/22

FIG. 19


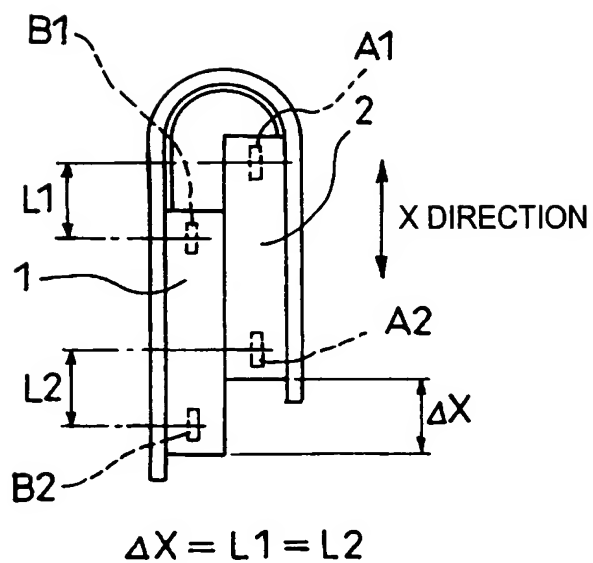


FIG. 20

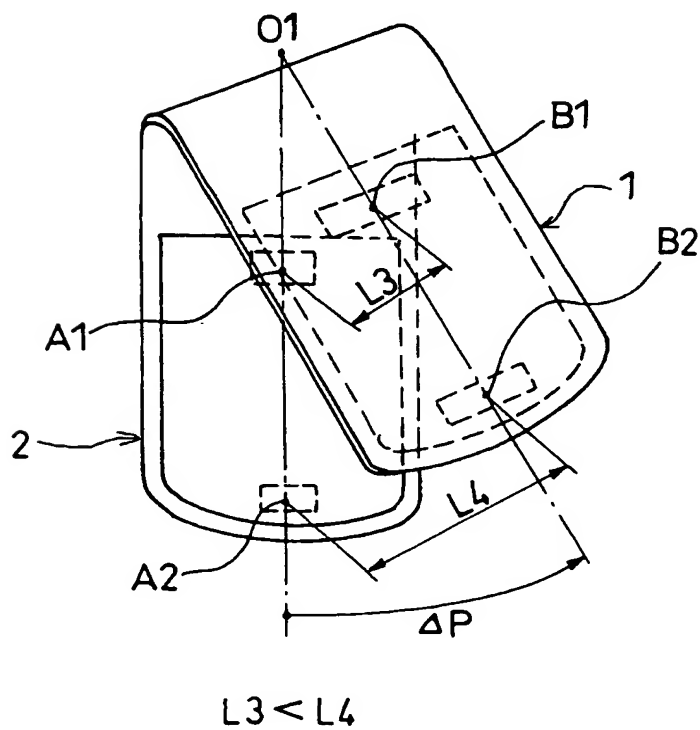

20/22

FIG. 21


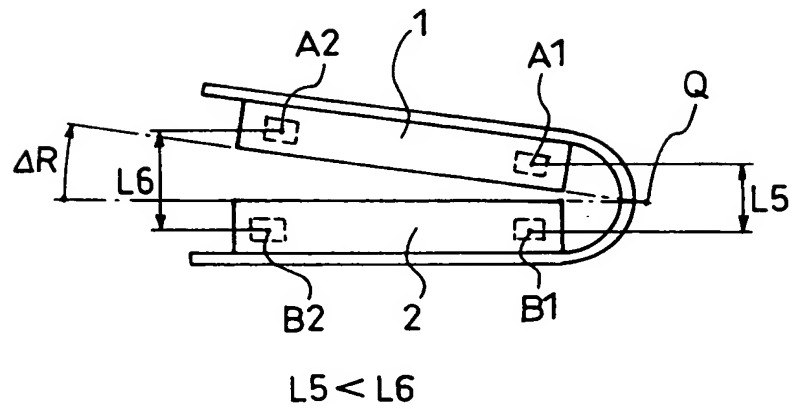


FIG. 22

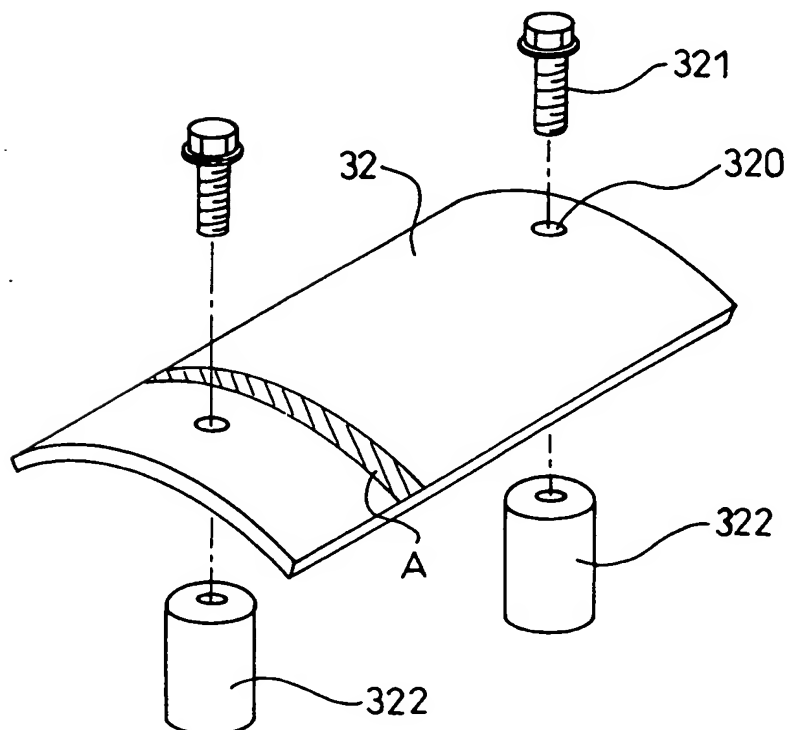

21/22

FIG. 23

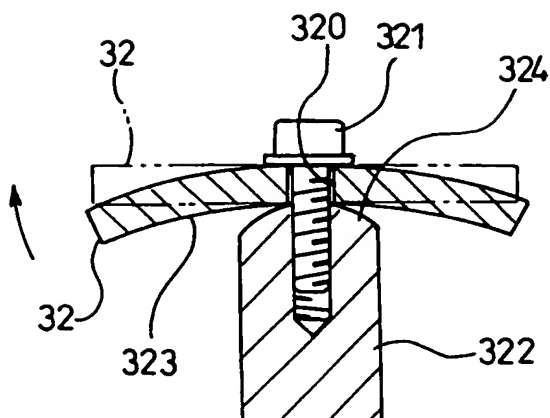


FIG. 24

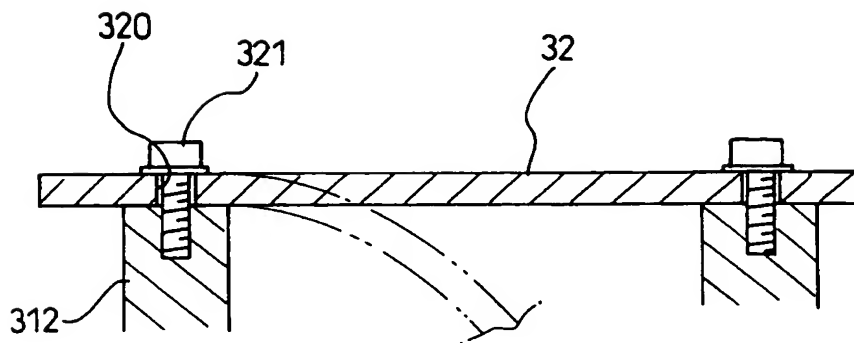


FIG. 25

